



**Item# SML 2801**  
**Pendant**

---

Fixture Dimension: D:13.77"(350mm) \* H:21"(534mm)

---

Wire/Chain/Rod Length: 2x6" Rods + 2x12" Rods

---

Fixture Color: Brass + ORB

---

Fixture Weight: 3.7kgs

---

Bulbs: 5\*40W,E12 Base-NOT INCLUDED

---

Maximum Wattage: 5 \* 40W

---

Voltage: 120V

---

Approved Location: Dry Location

---



Assembly Instructions for  
**Item# SML 2801**

**ATTENTION:**

FIXTURE INSTALLATION MUST BE DONE BY LICENSED ELECTRICIAN.


SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER.

USE ONLY THE SPECIFIED BULBS AND DO NOT EXCEED THE MAXIMUM WATTAGE.

**BEFORE YOU INSTALL:**


1. Check the fixture frame for any physical damage
2. Check all parts and crystals to ensure they are not damaged or missing
3. Test all sockets with a bulb for conductivity before “dressing” the fixture
4. If there is any problem, please do not install the fixture, please contact the vendor and solve the problem first.

**FIXTURE DIMENSIONS:**

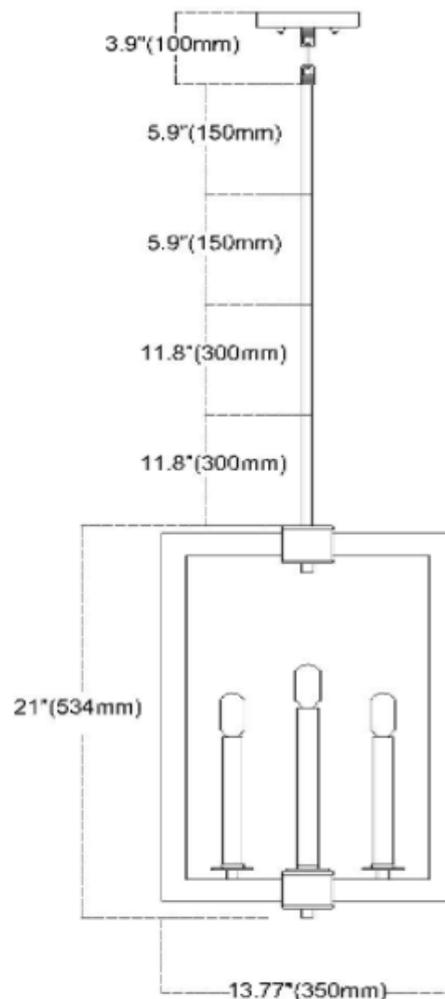


**PACKAGE CONTENT:**

1- Fixture frame: 1 Pc.

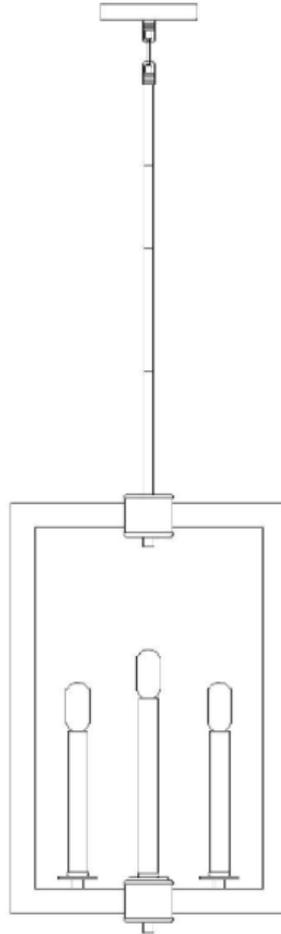


2- Crossbar: 1 Pc.



## INSTALLATION:

### Step 1: Install Crossbar

Attach the Crossbar to the Outlet Box with the head of the Secure it with Outlet Box Screws (not included). Tighten until snug.

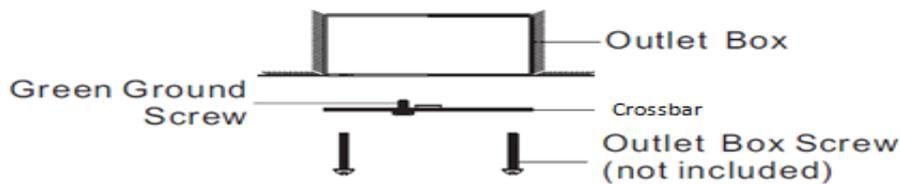


w facing you.

### Step 2: Wire Connections

Use standard wire connectors (Connectors are not included with fixture) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into outlet box.

Note: If the electrical wire is going to be cut shorter than provided you will need to identify the "L" line wire and the "N" neutral wire before you cut the excess wire off. One is labelled "N" and the other labelled "L". To do this separate the "L" line wire and the "N" neutral wire as far as you need to. Re-label the wire near where you want to make the cut. Be sure to mark the wire on the side of the fixture and not on the excess wire being cut and removed.

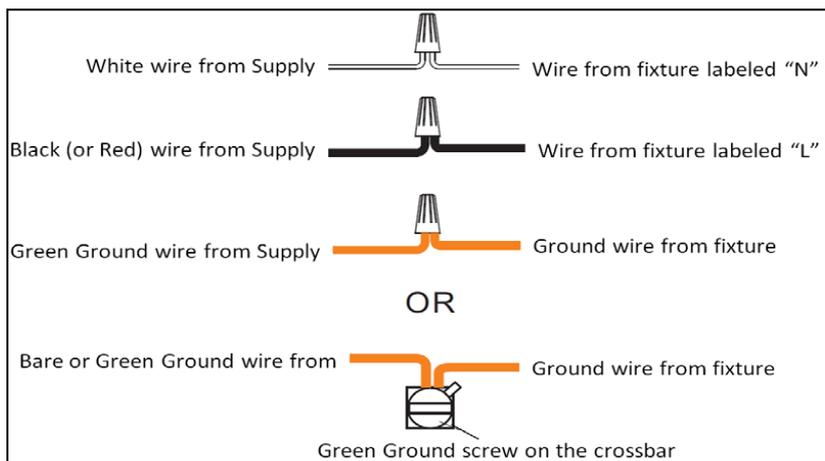

### Step 3: Fix the Rods as steps (refer to the drawing)

### Step 4: Install Bulb

Insert bulb (not included) and screw snugly into place.

