



# Assembly Instructions Sheet #SML3215

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wirecutters, wire strippers, electrical tape, safety glasses.

Light Source: Medium Base 60W bulb Maximum.

Estimated Assembly Time: 20-30 minutes.

Preparation: Identify and inspect all parts before beginning installation. Check package contents and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

### Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It's very important you read them completely before installing the fixture. We strongly recommend that a licensed professional electrical perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not touch the bulb with bare hands use a cloth or glove.

### Package Contents

- 15Pcs 15Pcs 25Pcs
- 25Pcs 1Pcs
- 25Pcs 1Pcs
- Crossbar Assembly x1
- Fixture Body x1
- Crystals x1 bag

**STEP 1** Attach crossbar assembly to Outlet Box



Figure 1

### STEP 2 - Test Fitting Ceiling Canopy to Crossbar Assembly.

A. Remove mounting balls and hex nuts from the Crossbar Assembly (A). Fit the ceiling canopy of Fixture Body (C) to Crossbar Assembly (A) and secure with hex nuts. Note: The ceiling canopy of Fixture.

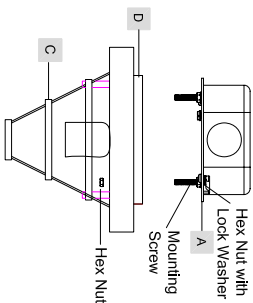


Figure 2

(Step2 Continued)  
Body (C) should be snug against the ceiling and the hexnuts. If not, adjust the length of mounting screws on the Crossbar Assembly (A) by unscrewing the preassembled hex nut and lock washer and then screwing the mounting screws in or out of the crossbar until the correct length is achieved. Once the ceiling canopy of Fixture Body (C) is secure, remove the hex nut and ceiling canopy of Fixture Body (C) and proceed to Step3.

### STEP 3 Make Wire Connections

A. Use standard wire connectors (not included) to make all wire connections. (connectors are not included with fixture.) Twist connection until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

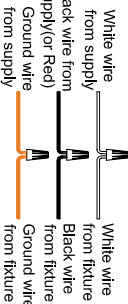


Figure 3

### STEP 4 - Install Fixture Body and Bulbs

A. Carefully tuck all wires into the outletbox and position the ceiling canopy of Fixture Body (C) over the outletbox. Align the holes in the ceiling canopy with mounting screws, then attach the ceiling canopy of Fixture Body (C) using the previously removed hex nuts. Hand tighten until snug.  
B. Thread mounting balls previously removed back onto mounting screws and hand tighten until snug.  
C. This fixture uses E26 Clear Bulbs (B). Maximum 60 watts. Insert bulb and seat properly into place.


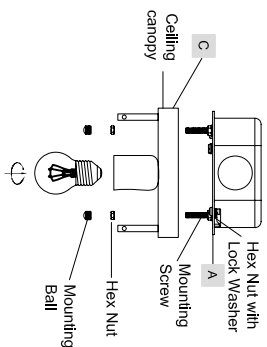



Figure 4

### (Step4 Continued)

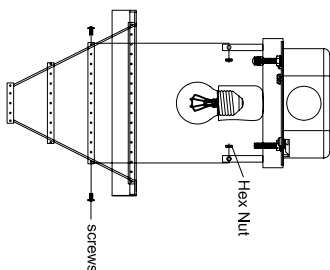

### STEP 5 - Attach Bead Strings



A. Place Bead Strings (D) inside of Fixture Body (C). Attach Bead Strings (D).  
B. This fixture uses E26 Bulbs (B). Maximum 60 watts. Insert bulb and seat properly into place.

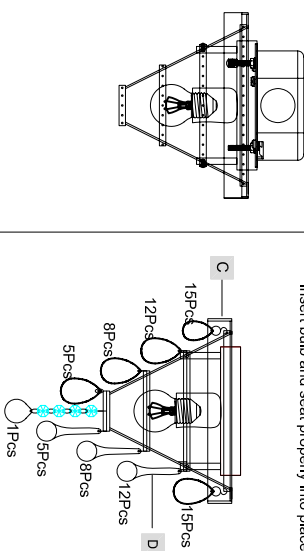

- 15Pcs 15Pcs 25Pcs
- 25Pcs 1Pcs

Figure 5

SML3215

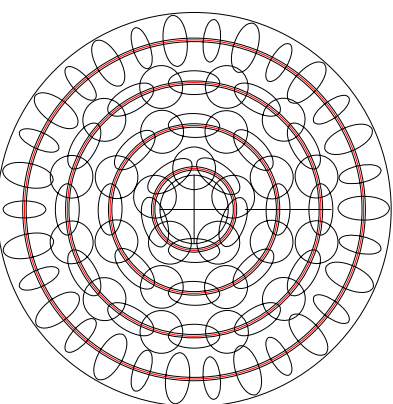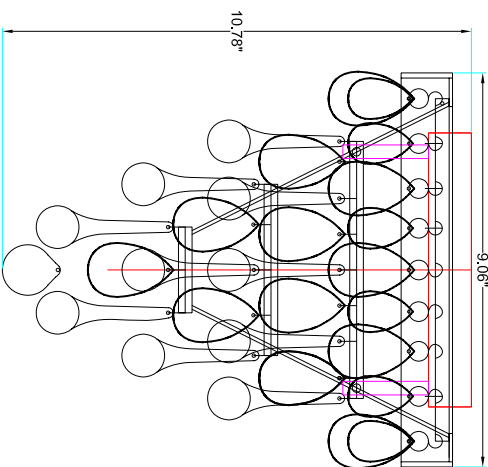

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

Figure 6