



Item# SML227120-3000K-GD

Chandelier

Fixture Dimension: D23.6"(60cm) x H79" (200cm)

Wire: 6.6ft. (200 CM)

Fixture Color: Gold

Fixture Weight: 18.5Lbs. (8.4Kg)

Bulbs: Integrated LED – Kelvin: 3000K – Lumen: 3400 - Dimmable

Wattage: 79W

Voltage: 110-120V~ 50/60Hz

Approved Location: Dry Location

Compatible Dimmers:

Lutron Maestro 150-Watt Single-Pole/3-Way MultiLocation Digital CFL-LED Dimmer

Lutron Maestro 150-Watt Multi-Location Digital CFL-LED Dimmer Kit - White

Lutron RadioRA RA-600L Dimmer Switch Radio RA - Almond

Lutron RadioRA RALV-600L Single Pole Dimmer Switch Radio RA - Light Almond LA

Leviton 6343-Wi Decora Single Or 3 Way X10 Dimmer Switch X-10 2

Leviton MicroDim Remote 17775

Leviton DZS15-1LZ Decora Z-Wave Controls 15-Amp Scene Capable Switch, White

Leviton VP00R-1LZ, Vizia + Digital Matching Remote Dimmer/Fan Speed Control, New



Assembly Instructions for

Item# SML227120-3000K-GD


ATTENTION:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER.
USE ONLY THE SPECIFIED BULBS AND DO NOT EXCEED THE MAXIMUM WATTAGE.

BEFORE YOU INSTALL:

1. Check the fixture frame for any physical damage
2. Check all parts and crystals to ensure they are not damaged or missing
3. Test all sockets with a bulb for conductivity before "dressing" the fixture
4. If there is any problem, please do not install the fixture, please contact the vendor and solve the problem first.

Outlet Box

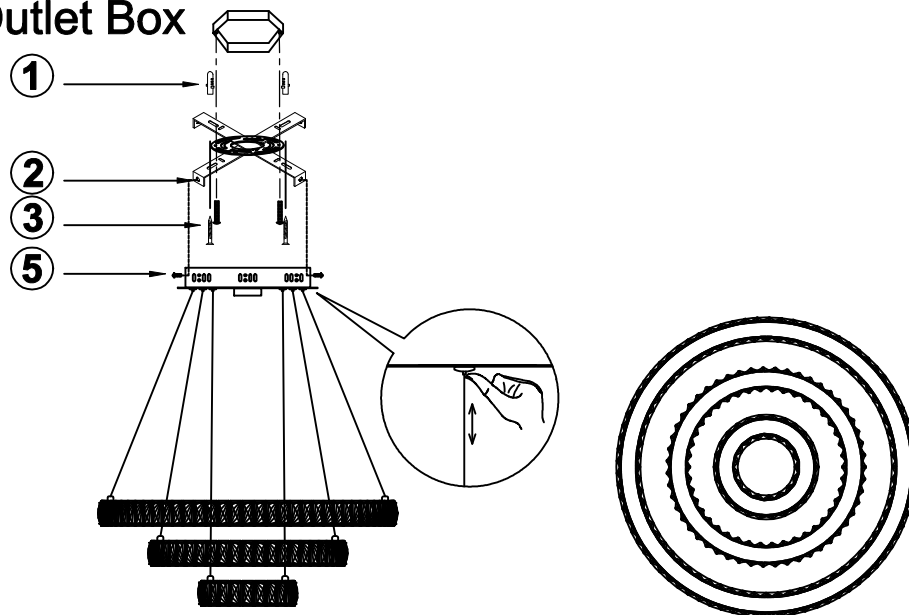

INSTALLATION STEPS:

1. For mounting into plaster - use the Rawl plugs (1) provided
2. Screw the cross bar (2) into the ceiling using the screws (3) as shown
3. Connect the junction box (4) to the cross bar, connect the wire correctly, L(black) N(white). E
4. Fix the junction box lid into place and lock bolt (5) to secure the fixture on the crossbar
5. Adjust the hanging height, push in the sleeve (6) then push up or push down the hanging wire to adjust

You have completed the installation for this fixture, enjoy it please.