

## Item# SML227160-3000K-GD Chandelier

**Fixture Dimension: L44.3"(112.5cm)xW7.9" (20cm) x H79" (200cm)**

**Wire: 6.6ft. (200 CM)**

**Fixture Color: Gold**

**Fixture Weight: 20.7Lbs. (9.4Kg)**

**Bulbs: Integrated LED – Kelvin: 3000K – Lumen: 2360 - Dimmable**

**Wattage: 64W**

**Voltage: 110-120V~ 50/60Hz**

**Approved Location: Dry Location**

### **Compatible Dimmers:**

**Lutron Maestro 150-Watt Single-Pole/3-Way MultiLocation Digital CFL-LED Dimmer**

**Lutron Maestro 150-Watt Multi-Location Digital CFL-LED Dimmer Kit - White**

**Lutron RadioRA RA-600L Dimmer Switch Radio RA - Almond**

**Lutron RadioRA RALV-600L Single Pole Dimmer Switch Radio RA - Light Almond LA**

**Leviton 6343-Wi Decora Single Or 3 Way X10 Dimmer Switch X-10 2**

**Leviton MicroDim Remote 17775**

**Leviton DZS15-1LZ Decora Z-Wave Controls 15-Amp Scene Capable Switch, White**

**Leviton VP00R-1LZ, Vizia + Digital Matching Remote Dimmer/Fan Speed Control, New**



Assembly Instructions for

## Item# SML227160-3000K-GD


### ATTENTION:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.  
SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER.  
USE ONLY THE SPECIFIED BULBS AND DO NOT EXCEED THE MAXIMUM WATTAGE.

### BEFORE YOU INSTALL:

1. Check the fixture frame for any physical damage
2. Check all parts and crystals to ensure they are not damaged or missing
3. Test all sockets with a bulb for conductivity before "dressing" the fixture
4. If there is any problem, please do not install the fixture, please contact the vendor and solve the problem first.

### Outlet Box

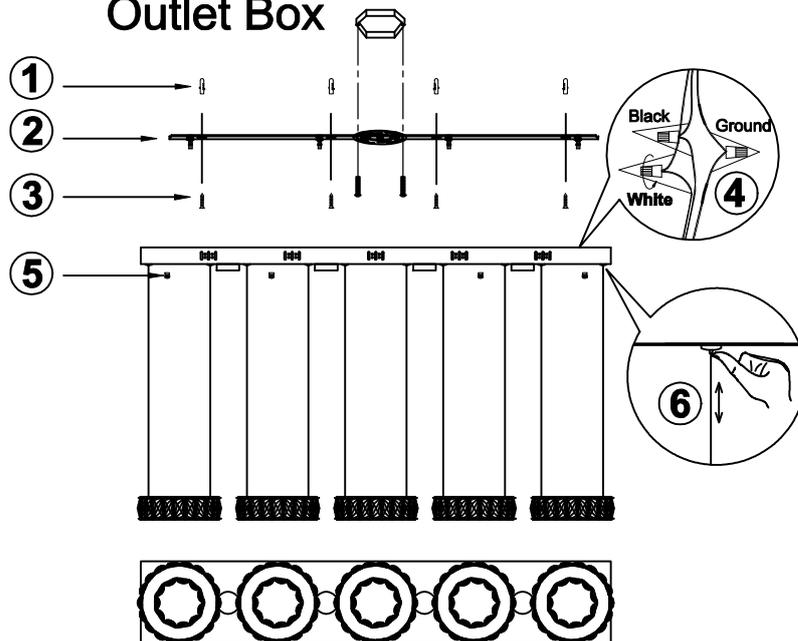

### INSTALLATION STEPS:

1. For mounting into plaster - use the Rawl plugs ( 1 ) provided
2. Screw the cross bar ( 2 ) into the ceiling using the screws ( 3 ) as shown
3. Connect the junction box ( 4 ) to the cross bar, connect the wire correctly, L(black) N(white). E
4. Fix the junction box lid into place and lock bolt ( 5 ) to secure the fixture on the crossbar
5. Adjust the hanging height, push in the sleeve ( 6 ) then push up or push down the hanging wire to adjust

You have completed the installation for this fixture, enjoy it please.